

MV POWER STATION

2200 / 2475 / 2500 / 2750 / 3000



MVPS 2200-20 / MVPS 2475-20 / MVPS 2500-20 / MVPS 2750-20 / MVPS 3000-20



Robust

- Station and all individual components type-tested
- Optimally suited to extreme ambient conditions

Easy to Use

- Plug and play concept
- Completely pre-assembled for easy set-up and commissioning

Cost-Effective

- Easy planning and installation
- Low transport costs due to 20-foot container

Flexible

- Global solution for international markets
- Numerous options
- Compatible with MVPS 4400 – MVPS 6000

MV POWER STATION 2200 / 2475 / 2500 / 2750 / 3000

Turnkey Solution for PV Power Plants

With the power of the new robust central inverters, the Sunny Central or Sunny Central Storage, and with perfectly adapted medium-voltage components, the new MV Power Station offers even more power density and is a turnkey solution available worldwide. The solution is the ideal choice for new generation PV power plants operating at 1500 V_{DC}. Delivered pre-configured in a 20-foot container, the solution is easy to transport and quick to assemble and commission. The MVPS and all components are type-tested. The MV Power Station combines rigorous plant safety with maximum energy yield and minimized deployment and operating risk.

MV POWER STATION


2200 / 2475 / 2500 / 2750 / 3000

Technical Data	MV Power Station 2200
Input (DC)	
Available inverters	1 x SC 2200 or 1 x SCS 2200
Max. input voltage	1100 V
Max. input current	3960 A
Number of DC inputs	24 double pole fused (32 single pole fused)
Integrated zone monitoring	○
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A
Output (AC) on the medium-voltage side	
Standard power at 1000 m and $\cos \varphi = 1$ (at 35°C / at 40°C / at 45°C) ¹⁾	2200 kVA / 2000 kVA / 0 kVA
Optionale power at 1000 m and $\cos \varphi = 1$ (at 35°C / at 50°C / at 55°C) ¹⁾	2200 kVA / 2000 kVA / 0 kVA
Typical nominal AC voltages	6.6 kV to 35 kV
AC power frequency	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11	● / ○
Transformer cooling methods ONAN ²⁾ / KNAN ²⁾	● / ○
Max. output current at 33 kV	39 A
Transformer no-load losses Standard / Ecodesign at 33 kV	2.3 kW / 1.74 kW
Transformer short-circuit losses Standard / Ecodesign at 33 kV	21.0 kW / 20.7 kW
Max. total harmonic distortion	< 3%
Reactive power feed-in	○ up to 60% of AC power
Power factor at rated power / displacement power factor adjustable	1 / 0.8 overexcited to 0.8 underexcited
Inverter efficiency	
Max. efficiency ³⁾	98.6%
European efficiency ³⁾	98.4%
CEC weighted efficiency ⁴⁾	98.0%
Protective devices	
Input-side disconnection point	DC load-break switch
Output-side disconnection point	Medium-voltage vacuum circuit breaker
DC overvoltage protection	Surge arrester type I
Galvanic isolation	●
Internal arc classification medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s
General Data	
Dimensions of the 20-foot container without integrated oil containment (W / H / D) ⁵⁾	6058 mm / 2591 mm / 2438 mm
Dimensions of the 20-foot container with integrated oil containment (W / H / D) ⁵⁾	6058 mm / 2896 mm / 2438 mm
Weight	< 16 t
Self-consumption (max. / partial load / average) ¹⁾	< 8.1 kW / < 1.8 kW / < 2.0 kW
Self-consumption (stand-by) ¹⁾	< 300 W
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP65
Environment: standard / chemically active / dusty	● / ○ / ○
Degree of protection according to IEC 60721-3-4 (4C1, 4S2 / 4C2, 4S2 / 4C2, 4S4)	● / ○ / ○
Maximum permissible value for relative humidity	15% to 95%
Max. operating altitude above mean sea level 1000 m / 2000 m / 3000 m / 4000	● / ○ / ○ / ○ (earlier temperature-dependent de-rating)
Fresh air consumption of inverter and transformer	6500 m ³ /h
Features	
DC terminal	Terminal lug
AC connection	Outer-cone angle plug
Tap changer for MV-transformer: without / with	● / ○
Shield winding for MV-Transformer: without / with	● / ○
Communication package	○
Station enclosure color	RAL 7004
Transformer for external loads: without / 20 kVA / 30 kVA	● / ○ / ○
Medium-voltage switchgear: without / 2 feeders / 3 feeders	● / ○ / ○
1 or 2 cable feeders with load-break switch, 1 transformer feeder with circuit breaker, internal arc classification IAC A FL 20 kA 1 s according to IEC 62271-200	
Accessories for medium-voltage switchgear: without / auxiliary contacts / motor for transformer feeder / cascade control / monitoring	● / ○ / ○ / ○ / ○
Oil containment: without / with (integrated)	● / ○
Industry standards (for other standards see the inverter datasheet)	IEC 62271-202, IEC 62271-200, IEC 60076 , CSC certificate, EN 50588-1
● Standard features ○ Optional features – Not available	
Type designation	MVPS-2200-20

- 1) Data based on inverter
- 2) ONAN = Mineral oil with natural air cooling; KNAN = Organic oil with natural air cooling
- 3) Efficiency measured at inverter without internal power supply
- 4) Efficiency measured at inverter with internal power supply
- 5) Transport dimensions

MV Power Station 2475	MV Power Station 2500	MV Power Station 2750	MV Power Station 3000
1 x SC 2475 or 1 x SCS 2475	1 x SC 2500-EV or 1 x SCS 2500-EV	1 x SC 2750-EV or 1 x SCS 2750-EV	1 x SC 3000-EV or 1 x SCS 3000-EV
1100 V	1500 V	1500 V	1500 V
3960 A	3200 A	3200 A	3200 A
24 double pole fused (32 single pole fused)			
○	○	○	○
200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A			
2475 kVA / 2250 kVA / 0 kVA	2500 kVA / 2250 kVA / 0 kVA	2750 kVA / 2500 kVA / 0 kVA	3000 kVA / 2700 kVA / 0 kVA
2475 kVA / 2250 kVA / 0 kVA	2500 kVA / 2250 kVA / 0 kVA	2750 kVA / 2500 kVA / 0 kVA	3000 kVA / 2700 kVA / 0 kVA
6.6 kV to 35 kV	6.6 kV to 35 kV	6.6 kV to 35 kV	6.6 kV to 35 kV
50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
43 A	44 A	49 A	53 A
2.5 kW / 1.92 kW	2.5 kW / 1.92 kW	2.8 kW / 2.1 kW	3.0 kW / 2.3 kW
23.2 kW / 23.0 kW	23.2 kW / 23.0 kW	25.5 kW / 25.3 kW	27.4 kW / 27.3 kW
< 3%	< 3%	< 3%	< 3%
○ up to 60% of AC power	○ up to 60% of AC power	○ up to 60% of AC power	○ up to 60% of AC power
1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited
98.6%	98.6%	98.7%	98.8%
98.4%	98.3%	98.6%	98.6%
98.0%	98.0%	98.5%	98.5%
DC load-break switch	DC load-break switch	DC load-break switch	DC load-break switch
Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker
Surge arrester type I	Surge arrester type I	Surge arrester type I	Surge arrester type I
●	●	●	●
IAC A 20kA 1s	IAC A 20kA 1s	IAC A 20kA 1s	IAC A 20kA 1s
6058 mm / 2591 mm / 2438 mm	6058 mm / 2591 mm / 2438 mm	6058 mm / 2591 mm / 2438 mm	6058 mm / 2591 mm / 2438 mm
6058 mm / 2896 mm / 2438 mm	6058 mm / 2896 mm / 2438 mm	6058 mm / 2896 mm / 2438 mm	6058 mm / 2896 mm / 2438 mm
< 16 t	< 16 t	< 16 t	< 16 t
< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW
< 300 W	< 370 W	< 370 W	< 370 W
Control rooms IP23D, inverter electronics IP65			
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
15% to 95%	15% to 95%	15% to 95%	15% to 95%
● / ○ / ○ / ○	● / ○ / ○ / ○ – (earlier temperature-dependent de-rating)		
(earlier temperature-dependent de-rating)	6500 m ³ /h	6500 m ³ /h	6500 m ³ /h
6500 m ³ /h			
Terminal lug	Terminal lug	Terminal lug	Terminal lug
Outer-cone angle plug	Outer-cone angle plug	Outer-cone angle plug	Outer-cone angle plug
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
○	○	○	○
RAL 7004	RAL 7004	RAL 7004	RAL 7004
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○
● / ○	● / ○	● / ○	● / ○
IEC 62271-202, IEC 62271-200, IEC 60076 , CSC certificate, EN 50588-1			
MVPS-2475-20	MVPS-2500-20	MVPS-2750-20	MVPS-3000-20

System diagram with Sunny Central

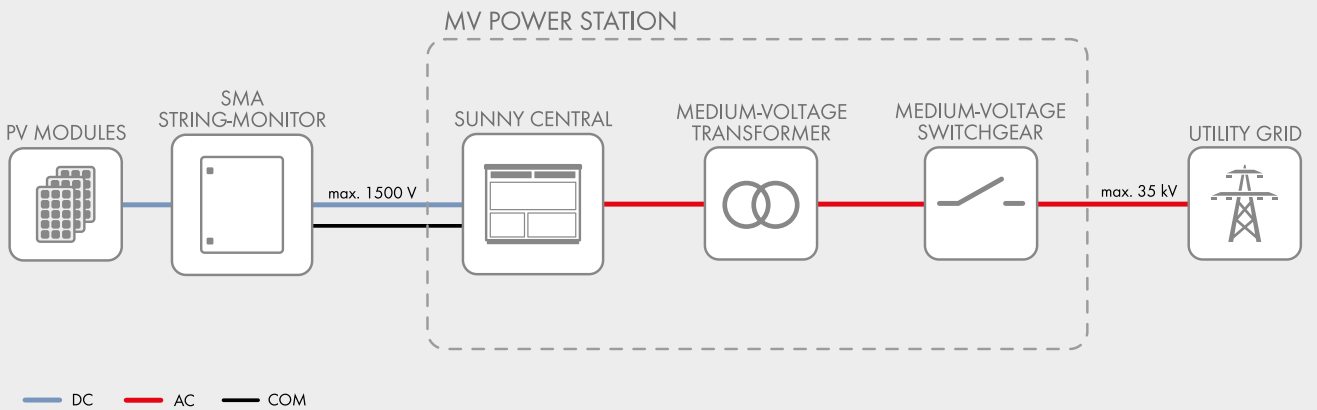

System diagram with Sunny Central Storage

