

# MV POWER STATION

## 4000-S2 / 4200-S2 / 4400-S2 / 4600-S2



MVPS-4000-S2 / MVPS-4200-S2 / MVPS-4400-S2 / MVPS-4600-S2



### Robust

- Station and all individual components type-tested
- Optimally suited to extreme ambient conditions

### Easy to Use

- Plug and play concept
- Completely pre-assembled for easy set-up and commissioning

### Cost-Effective

- Easy planning and installation
- Low transport costs due to 20-foot skid

### Flexible

- One design for the whole world
- DC-Coupling Ready
- Numerous options

## MV POWER STATION 4000-S2 / 4200-S2 / 4400-S2 / 4600-S2

Turnkey Solution for PV Power Plants and large-scale storage systems

With the power of the new robust central inverters, the Sunny Central UP or Sunny Central Storage UP, and with perfectly adapted medium-voltage components, the new MV Power Station offers even more power density and is a turnkey solution available worldwide. Being the ideal choice for the new generation of PV power plants operating at 1500 VDC, the integrated system solution is easy to transport and quick to assemble and commission. The MVPS and all components are type-tested. The MV Power Station combines rigorous plant safety with maximum energy yield and minimized deployment and operating risk. The MV Power Station is prepared for DC coupling.

# MV POWER STATION


## 4000-S2 / 4200-S2 / 4400-S2 / 4600-S2

Technical Data	MVPS 4000-S2	MVPS 4200-S2
<b>Input (DC)</b>		
Available inverters	1 x SC 4000 UP or 1 x SCS 3450 UP or 1 x SCS 3450 UP-XT	1 x SC 4200 UP or 1 x SCS 3600 UP or 1 x SCS 3600 UP-XT
Max. input voltage	1500 V	1500 V
Number of DC inputs	dependent on the selected inverters	
Integrated zone monitoring	○	
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
<b>Output (AC) on the medium-voltage side</b>		
Rated power at SC UP (at -25°C to +35°C / 40°C optional 50°C) <sup>1)</sup>	4000 kVA / 3600 kVA	4200 kVA / 3780 kVA
Rated power at SCS UP (at -25°C bis +25°C / 40°C optional 50°C) <sup>1)</sup>	3450 kVA / 2930 kVA	3620 kVA / 3075 kVA
Charging power at SCS UP-XT (at -25°C bis +25°C / 40°C optional 50°C) <sup>1)</sup>	3590 kVA / 3000 kVA	3770 kVA / 3150 kVA
Discharging power at SCS UP-XT (at -25°C bis +25°C / 40°C optional 50°C) <sup>1)</sup>	4000 kVA / 3400 kVA	4200 kVA / 3570 kVA
Typical nominal AC voltages	10 kV to 35 kV	10 kV to 35 kV
AC power frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11 / YNy0	● / ○ / ○	● / ○ / ○
Transformer cooling methods	KNAN <sup>2)</sup>	KNAN <sup>2)</sup>
Transformer no-load losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Transformer short-circuit losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Max. total harmonic distortion	< 3%	
Reactive power feed-in (up to 60% of nominal power)	○	
Power factor at rated power / displacement power factor adjustable	1 / 0.8 overexcited to 0.8 underexcited	
<b>Inverter efficiency</b>		
Max. efficiency <sup>3)</sup> / European efficiency <sup>3)</sup> / CEC weighted efficiency <sup>4)</sup>	98.8% / 98.6% / 98.5%	98.8% / 98.7% / 98.5%
<b>Protective devices</b>		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	Medium-voltage vacuum circuit breaker	
DC overvoltage protection	Surge arrester type I	
Galvanic isolation	●	
Internal arc classification medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s	
<b>General Data</b>		
Dimensions (W / H / D)	6058 mm / 2896 mm / 2438 mm	
Weight	< 18 t	
Self-consumption (max. / partial load / average) <sup>1)</sup>	< 8.1 kW / < 1.8 kW / < 2.0 kW	
Self-consumption (stand-by) <sup>1)</sup>	< 370 W	
Ambient temperature -25°C to +45°C / -25°C to +55°C / -40°C to +45°C	● / ○ / ○	
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP54	
Environment: standard / harsh	● / ○	
Degree of protection according to IEC 60721-3-4 (4C1, 4S2 / 4C2, 4S4)	● / ○	
Maximum permissible value for relative humidity	95% (for 2 months/year)	
Max. operating altitude above mean sea level 1000 m / 2000 m	● / ○	
Fresh air consumption of inverter	6500 m <sup>3</sup> /h	
<b>Features</b>		
DC terminal	Terminal lug	
AC connection	Outer-cone angle plug	
Tap changer for MV-transformer: without / with	● / ○	
Shield winding for MV-Transformer: without / with	● / ○	
Monitoring package	○	
Station enclosure color	RAL 7004	
Transformer for external loads: without / 10 / 20 / 30 / 40 / 50 / 60 kVA	● / ○ / ○ / ○ / ○ / ○ / ○ / ○	
Medium-voltage switchgear: without / 1 feeder / 3 feeders	● / ○ / ○	
2 cable feeders with load-break switch, 1 transformer feeder with circuit breaker, internal arc classification IAC A FL 20 kA 1 s according to IEC 62271-200	● / ○ / ○	
Short circuit rating medium voltage switchgear (20 kA 1 s / 20 kA 3 s / 25 kA 1 s)	● / ○ / ○	
Accessories for medium-voltage switchgear: without / auxiliary contacts / motor for transformer feeder / cascade control / monitoring	● / ○ / ○ / ○ / ○	
Integrated oil containment: without / with	● / ○	
Industry standards (for other standards see the inverter datasheet)	IEC 60076, IEC 62271-200, IEC 62271-202, EN50588-1, CSC Certificate	
● Standard features   ○ Optional features   – Not available		
Type designation	MVPS-4000-S2	MVPS-4200-S2

- 1) Data based on inverter. Further details can be found in the data sheet of the inverter.  
 2) KNAN = Ester with natural air cooling  
 3) Efficiency measured at inverter without internal power supply  
 4) Efficiency measured at inverter with internal power supply

Technical Data	MVPS 4400-S2	MVPS 4600-S2
<b>Input (DC)</b>		
Available inverters	1 x SC 4400 UP or 1 x SCS 3800 UP or 1 x SCS 3800 UP-XT	1 x SC 4600 UP or 1 x SCS 3950 UP or 1 x SCS 3950 UP-XT
Max. input voltage	1500 V	1500 V
Number of DC inputs	dependent on the selected inverters	
Integrated zone monitoring	○	
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
<b>Output (AC) on the medium-voltage side</b>		
Rated power at SC UP (at -25°C to +35°C / 40°C optional 50°C) <sup>1)</sup>	4400 kVA / 3960 kVA	4600 kVA / 4140 kVA
Rated power at SCS UP (at -25°C bis +25°C / 40°C optional 50°C) <sup>1)</sup>	3800 kVA / 3230 kVA	3960 kVA / 3365kVA
Charging power at SCS UP-XT (at -25°C bis +25°C / 40°C optional 50°C) <sup>1)</sup>	3950 kVA / 3300 kVA	4130 kVA / 3455 kVA
Discharging power at SCS UP-XT (at -25°C bis +25°C / 40°C optional 50°C) <sup>1)</sup>	4400 kVA / 3740 kVA	4600 kVA / 3910 kVA
Typical nominal AC voltages	10 kV to 35 kV	10 kV to 35 kV
AC power frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11 / YNy0	● / ○ / ○	● / ○ / ○
Transformer cooling methods	KNAN <sup>2)</sup>	KNAN <sup>2)</sup>
Transformer no-load losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Transformer short-circuit losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Max. total harmonic distortion	< 3%	
Reactive power feed-in (up to 60% of nominal power)	○	
Power factor at rated power / displacement power factor adjustable	1 / 0.8 overexcited to 0.8 underexcited	
<b>Inverter efficiency</b>		
Max. efficiency <sup>3)</sup> / European efficiency <sup>3)</sup> / CEC weighted efficiency <sup>4)</sup>	98.8% / 98.7% / 98.5%	98.8% / 98.7% / 98.5%
<b>Protective devices</b>		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	Medium-voltage vacuum circuit breaker	
DC overvoltage protection	Surge arrester type I	
Galvanic isolation	●	
Internal arc classification medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s	
<b>General Data</b>		
Dimensions (W / H / D)	6058 mm / 2896 mm / 2438 mm	
Weight	< 18 t	
Self-consumption (max. / partial load / average) <sup>1)</sup>	< 8.1 kW / < 1.8 kW / < 2.0 kW	
Self-consumption (stand-by) <sup>1)</sup>	< 370 W	
Ambient temperature -25°C to +45°C / -25°C to +55°C / -40°C to +45°C	● / ○ / ○	
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP54	
Environment: standard / harsh	● / ○	
Degree of protection according to IEC 60721-3-4 (4C1, 4S2 / 4C2, 4S4)	● / ○	
Maximum permissible value for relative humidity	95% (for 2 months/year)	
Max. operating altitude above mean sea level 1000 m / 2000 m	● / ○	
Fresh air consumption of inverter	6500 m <sup>3</sup> /h	
<b>Features</b>		
DC terminal	Terminal lug	
AC connection	Outer-cone angle plug	
Tap changer for MV-transformer: without / with	● / ○	
Shield winding for MV-Transformer: without / with	● / ○	
Monitoring package	○	
Station enclosure color	RAL 7004	
Transformer for external loads: without / 10 / 20 / 30 / 40 / 50 / 60 kVA	● / ○ / ○ / ○ / ○ / ○ / ○ / ○	
Medium-voltage switchgear: without / 1 feeder / 3 feeders	● / ○ / ○	
2 cable feeders with load-break switch, 1 transformer feeder with circuit breaker, internal arc classification IAC A FL 20 kA 1 s according to IEC 62271-200	● / ○ / ○	
Short circuit rating medium voltage switchgear (20 kA 1 s / 20 kA 3 s / 25 kA 1s)	● / ○ / ○	
Accessories for medium-voltage switchgear: without / auxiliary contacts / motor for transformer feeder / cascade control / monitoring	● / ○ / ○ / ○ / ○	
Integrated oil containment: without / with	● / ○	
Industry standards (for other standards see the inverter datasheet)	IEC 60076, IEC 62271-200, IEC 62271-202, EN50588-1, CSC Certificate	
● Standard features ○ Optional features – Not available		
Type designation	MVPS-4400-S2	MVPS-4600-S2

### System diagram with Sunny Central UP

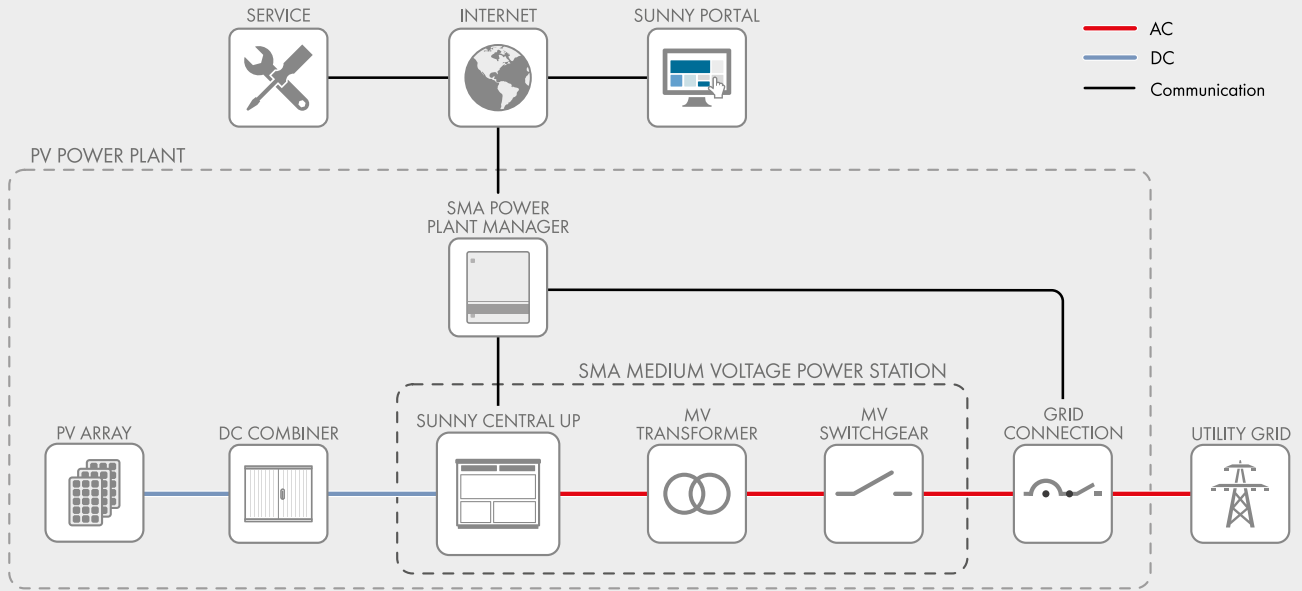

### System diagram with Sunny Central Storage UP

